



شركة الكون للتجهيزات المحدودة ٩٦٦٥٩١٠٠٨٠٣٢ - ٩٦٦٥٦٥٣٨٤٢٣٤  
معدات مراكز صيانة سيارات وورش تخفيضات على البيع حتى نهاية ٢٠١٢ م

## Quotation Sheet

**Promotion Validity: before Dec 30th**

	Picture
manual unlocking Floor plate Two Post Lift (TLT235SB) رافعة سيارات ٣,٥ طن	Model
SR 15000 FOB Jeddah	Price
1-2sets	MOQ
Capacity: 3.5T Lifting height: 1.95M Lifting time: 50Sec Lowering time: 40Sec Power supply: AC380/AC220V Motor power: 2.2KW Drive through width: 3.37M Overall height: 2.86M bottom Clearance: 1.1M Package: 2900*550*740mm Weight: 610KG	Description

	<p style="text-align: center;"><b>Picture</b></p>
<p><b>Manual unlocking Floor plate Two Post Lift (TLT240SB)</b></p>	<p style="text-align: center;"><b>Model</b></p>
<p><b>SR 16500</b> FOB Jeddah</p>	<p style="text-align: center;"><b>Price</b></p>
<p><b>1sets</b> رافعة سيارات حمولة ٤ طن</p>	<p style="text-align: center;"><b>MOQ</b></p>
<p>Capacity: 4T  Lifting height: 1.95M  Lifting time: 50Sec  Lowering time: 40Sec  Power supply: AC380/AC220V  Motor power: 2.2KW  Drive through width: 3.37M  Overall height: 2.86M bottom  Clearance: 1.1M  Package: 2900*550*740mm  Weight: 610KG</p>	<p style="text-align: center;"><b>Description</b></p>

	<p style="text-align: center;"><b>PROMOTION!!!</b></p> <p style="text-align: center;"><b>Picture</b></p>
<p><b>Manual unlocking Floorplate Two Post Lift (TLT235SC )</b></p>	<p style="text-align: center;"><b>Model</b></p>
<p><b>SR 16700</b> FOB Jeddah</p>	<p style="text-align: center;"><b>Price</b></p>
<p><b>1-2sets</b></p>	<p style="text-align: center;"><b>MOQ</b></p>
<p>Capacity: 3.5T رافعة سيارات حمولة ٣,٥ طن  Lifting height: 1.95M  Lifting time: 50Sec  Lowering time: 40Sec  Power supply: AC380/AC220V  Motor power: 2.2KW  Drive through width: 3.37M</p>	<p style="text-align: center;"><b>Description</b></p>

<b>Overall height: 2.86M bottom</b> <b>Clearance: 1.1M</b> <b>Package: 2900*550*740mm</b> <b>Weight: 610KG</b>	
---	--

		<b>Picture</b>
---	--	----------------

<b>Manual unlocking Floorplate Two Post Lift (TLT240SC)</b>	<b>Model</b>
---	--------------

<b>SR 17000</b>	<b>Price</b>
-----------------	--------------

<b>1-2 sets</b>	<b>MOQ</b>
-----------------	------------

<b>Capacity: 4T رافعة حمولة ٤ طن</b> <b>Lifting height: 1.95M</b> <b>Lifting time: 50Sec</b> <b>Lowering time: 40Sec</b> <b>Power supply: AC380/AC220V</b> <b>Motor power: 2.2KW</b> <b>Drive through width: 3.37M</b> <b>Overall height: 2.86M bottom</b> <b>Clearance: 1.1M</b> <b>Package: 2900*550*740mm</b> <b>Weight: 610KG</b>	<b>Description</b>
---	--------------------


		<b>Picture</b>
---	--	----------------

<b>Electronic unlocking Floorplate Two Post Lift (TLT235SBA)</b>	<b>Model</b>
--	--------------



<b>USD 17100</b> FOB Jeddah	<b>Price</b>
<b>1-2 sets</b>	<b>MOQ</b>
<ul style="list-style-type: none"> <li>*Rated capacity(kg) 3500</li> <li>*Lifting height(mm) 1950</li> <li>*Lifting time(S) 50</li> <li>*Lowering time(S) 40</li> <li>*Motor power(kw) 2.2</li> <li>*Passage width(mm) 2486</li> <li>*Overall width(mm) 3370</li> <li>*Overall height(mm) 2860</li> <li>*Bottom clearance(mm) 110</li> </ul>	<b>Description</b>

	<b>Picture</b>
---	----------------


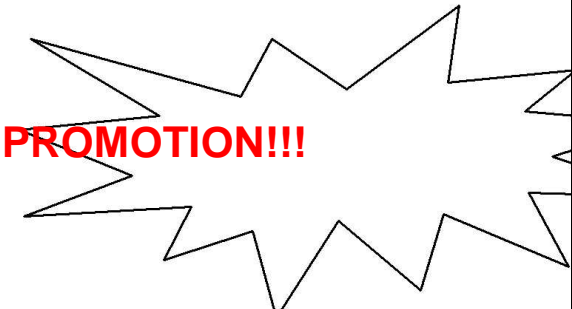
<b>Electronic unlocking floorplate Two Post Lift (TLT240SBA)</b>	<b>Model</b>
<b>SR 18700</b> FOB Jeddah	<b>Price</b>
<b>1-2 sets</b>	<b>MOQ</b>
<ul style="list-style-type: none"> <li>*Rated capacity(kg) 4000 رافعة حمولة ٤ طن</li> <li>*Lifting height(mm) 1950</li> <li>*Lifting time(S) 50</li> <li>*Lowering time(S) 40</li> <li>*Motor power(kw) 2.2</li> <li>*Passage width(mm) 2486</li> <li>*Overall width(mm) 3370</li> <li>*Overall height(mm) 2860</li> <li>*Bottom clearance(mm) 110</li> </ul>	<b>Description</b>


	<b>Picture</b>
---	----------------

<b>Electronic Floor plate Two Post Lift with extension (TLT235SBAE)</b>	<b>Model</b>
<b>SR 17800 FOB Jeddah</b>	<b>Price</b>
<b>1-2 sets</b>	<b>MOQ</b>
<b>Features:</b> Dual hydraulic cylinders drive, stable lifting and lowering. Adopt two steel cables for equalization, force two carriages to move synchronously. 2. Electro-magnetic lock release device which is easy for operation 3. with extension to make it possible to install on weak floor. <b>Specification:</b> <b>Capacity: 3.5T</b> <b>Lifting height: 1.95M</b>  <b>Lifting time: 50Sec</b> <b>Lowering time: 40Sec</b> <b>Power supply: AC380/AC220V</b> <b>Motor power: 2.2KW</b> <b>Drive through width: 3.37M</b> <b>Overall height: 2.86M bottom</b> <b>Clearance: 1.1M</b> <b>Package: 2900*550*740mm</b> <b>Weight: 610KG</b>	<b>Description</b>

<b>Picture</b>	 
	<b>Electronic unlocking Floor plate Two Post Lift (TLT235SCA)</b> <b>Model</b>
	<b>SR 17900 FOB Jeddah</b> <b>Price</b>
<b>1 -2 sets</b>	<b>MOQ</b>
<b>Features:</b> <b>Capacity: 3.5T</b> <b>Lifting height: 1.95M</b> <b>Lifting time: 50Sec</b> <b>Lowering time: 40Sec</b> <b>Power supply: AC380/AC220V</b> <b>Motor power: 2.2KW</b> <b>Drive through width: 3.37M</b> <b>Overall height: 2.86M</b> <b>Bottom clearance: 1.1M</b> <b>Package: 2900*550*740mm</b>	<b>Description</b>



	<b>Weight: 760KG</b>
--	----------------------

 <div data-bbox="742 264 1316 571" style="text-align: center;">  <p><b>PROMOTION!!!</b></p> </div>	<b>Picture</b>
<b>Electronic unlocking Floor plate Two Post Lift (TLT240SCA)</b>	<b>Model</b>
<b>SR 16900 FOB Jeddah</b>	<b>Price</b>
<b>1 -2 sets</b>	<b>MOQ</b>
<b>Capacity: 4T</b> <b>Lifting height: 1.95M</b> <b>Lifting time: 50Sec</b> <b>Lowering time: 40Sec</b> <b>Power supply: AC380/AC220V</b> <b>Motor power: 2.2KW</b> <b>Drive through width: 3.37M</b> <b>Overall height: 2.86M</b> <b>Bottom clearance: 1.1M</b> <b>Package: 2900*550*740mm</b> <b>Weight: 760KG</b>	<b>Description</b>

		<b>Picture</b>
	<b>Tire Changer (TWC-401NIC) جهاز اصلاح بنشر</b>	<b>Model</b>
<b>SR 8500</b>	<b>FOB Jeddah</b>	<b>Price</b>
<b>1-2 sets</b>		<b>MOQ</b>
<b>Description</b>	<p><b>Introduction: TWC-401NIC tyre changer is an improved product, is used for demounting, mounting and inflating tyres of small vehicles. It features simple operation and high reliability. It can also be a great help in car repair garage and tyre dealers.</b></p> <p><b>Features:</b></p> <p><b>Smart design and safe structure, some parts made of patent material Wide rim diameter capacity suitable for most Asian tyres Powerful motor Reliable drive unit Low noise Optional accessories</b></p>	

	<p>Mounting heads (metal and PA66 ) have optimized profiling for maximum efficiency; Special design for tyre protection with rigid and durable features nternational standard (CE, UL)</p> <p><b>Specification:</b></p> <p><b>Max. Wheel diameter: 1000mm</b></p> <p><b>Max. Rim width: 400mm</b></p> <p><b>Rim clamping diameter(inner): 13"-20"</b></p> <p><b>Rim clamping diameter(outer): 10"-17"</b></p> <p><b>Power supply: 110V/220V/230V50Hz/60Hz</b></p> <p><b>Power of motor: 1.1kw</b></p>
--	---

	 
	<p><b>Tire Changer (TWC-502RMB) جهاز اصلاح بنشر</b> <span style="float: right;"><b>Model</b></span></p>
<b>SR 15000</b>	<p><b>FOB Jeddah</b> <span style="float: right;"><b>Price</b></span></p>
<b>1-2 sets</b>	<p><b>MOQ</b></p>
<p><b>Max. wheel diameter1000mm</b></p> <p><b>Max. rim width420mm</b></p> <p><b>Rim clamping diameter(inner)13-23</b></p> <p><b>Rim clamping diameter(outer)10-20</b></p> <p><b>Working pressure8-10bar</b></p> <p><b>Bead breaker force≥18000N</b></p> <p><b>Power supply110V/220V/230V50Hz/60Hz</b></p> <p><b>Power of motor1.1kw</b></p> <p><b>RPM of turntable6-8rpm</b></p> <p><b>Torque of turntable1070Nm</b></p>	<p><b>Description</b></p>

	 
	<p><b>Wheel Balancer (KWB-402) جهاز اصلاح بنشر</b> <span style="float: right;"><b>Model</b></span></p>
<b>SR 6500</b>	<p><b>FOB Jeddah</b> <span style="float: right;"><b>Price</b></span></p>

<b>1 -2 sets</b>	<b>MOQ</b>
<b>Rim Diameter: 10inch~22inch(254--558mm)</b> <b>Rim Width: 1.5inch~18inch(38--457mm)</b> <b>Balancing precision: <math>\pm 1g</math></b> <b>Cycle time: 7s</b> <b>Power supply: 220V/110V 50Hz/60Hz</b> <b>Motor Power: 180W/370W</b> <b>RPM: 240rpm</b> <b>Working noise: &lt;70dB(A)</b> <b>Temperature: 0~50</b> <b>Humidity: =&lt;85 percentage</b> <b>Max. Wheel Weigh: 65kg</b> <b>Dimensions: 1200*1000*1350mm</b>	<b>Description</b>

		<b>Picture</b>
--	---	----------------

<b>Wheel Aligner (X-631) ميزان الكتروني</b>	<b>Model</b>
---	--------------

<b>SR 48000 FOB Jeddah</b>	<b>Price</b>
----------------------------	--------------

<b>1 -2 sets</b>	<b>MOQ</b>
------------------	------------


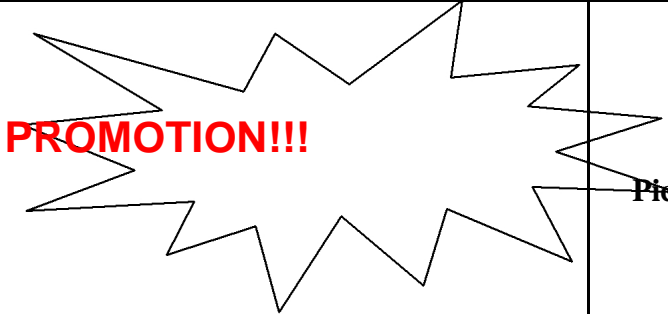
<b>Item Range</b> <b>Front total toe-in -40 to +40</b> <b>Front toe-in -20 to +20</b> <b>Front camber -8.0 to +8</b> <b>Caster -20 to +20</b> <b>Kingpin inclination -20 to + 20</b> <b>Rear total toe-in -40 to +40</b> <b>Rear toe-in -20 to +20</b> <b>Rear Camber -8 to +8</b> <b>Thrust angle -5 to +5</b>	<b>Description</b>
--	--------------------

		<b>Picture</b>
---	--	----------------


<b>Wheel Aligner (X-631+) ميزان الكتروني</b>	<b>Model</b>
--	--------------



<b>SR 55000 FOB Jeddah</b>	<b>Price</b>
<b>1 -2 sets</b>	<b>MOQ</b>
<b>Time saving features:</b> <b>Standard measurement</b> <b>Fast test</b> <b>short overview of toe, camber, thrust angle in a second</b> <b>Additional test, for accident cars</b> <b>Lower car function, no need for lowering clamps</b> <b>Customer defined car data base</b>  <b>Reliable: Solid constructions of sensor heads</b> <b>Water protected</b> <b>Standard batteries</b> <b>Standard high quality Pc</b> <b>Self centering clamps, optional adapters for aluminum rims available</b> <b>Cable free measurement, removes hassle for broken cables</b> <b>Affordable:: Unbeatable price / performance ratio</b> <b>Designed for long time use.</b>	<b>Description</b>

 	<b>Picture</b>
<b>Auto Scanner (X-431 Master) جهاز فحص سيارات</b>	<b>Model</b>
<b>SR 15000 FOB Jeddah</b>	<b>Price</b>
<b>1 -2 sets</b>	<b>MOQ</b>
<b>Operating System: LINUX</b> <b>Memory: 16M</b> <b>CF Card: 512M</b> <b>Main Unit I/O: Universal Serial Bus /Standard Parallel port</b> <b>Main Unit Voltage: DC12V / 24V</b> <b>Main Unit Power: Approximately 9W</b> <b>Printer: Thermal mini-printer</b> <b>Display Screen: 240X320 LCD with touch screen and backlit</b> <b>Components: Main unit, SMARTBOX and MINIPRINTER</b> <b>Ambient temperature: 0-50</b> <b>Relative Humidity: &lt;90%</b>	<b>Description</b>

Picture		
	<b>Auto Scanner (X-431 Diagon) جهاز فحص سيارات</b>	<b>Model</b>
<b>SR 16200</b>	FOB Jeddah	<b>Price</b>
<b>1 -2 sets</b>		<b>MOQ</b>
<b>Introduction:</b>	<p><b>X-431 Diagon is a specially designed diagnostic tool for automotive technicians. Compact main unit, powerful diagnostic functions, fast and convenient update, universal connectors, make it the first choice for technicians. X-431 Diagon is the standard equipment for technicians.</b></p>	
		<b>Description</b>

Picture		
	<b>Auto Scanner (X-431 GDS) جهاز فحص سيارات</b>	<b>Model</b>
<b>SR 18900</b>	FOB Jeddah	<b>Price</b>
<b>1 -2 sets</b>		<b>MOQ</b>
<b>Introduction:</b>	<p><b>X-431 GDS is a new generation high-end integrated diagnostic products from LAUNCH Company, it fully considered of user's operation, usage and senses, develop to multi-function module from single function module, and integrated with Wi-Fi communication technologies to make the products more professional, industrial, modular, network and user-friendly, thereby lead automobile troubleshooting into a diversified network era comprehensively. The main module of this product integrated with display, print and diagnostic, and the remaining function modules are unified form and can be used independently. Users can purchase any functional modules that they actual needed, each functional module can connect and communicate with the main module via the standard USB</b></p>	
		<b>Description</b>

	 
	<b>X431 heavy duty</b> جهاز فحص شاحنات <b>Model</b>
<b>SR 15500</b>	FOB Jeddah <b>Price</b>
<b>1-2 sets</b>	<b>MOQ</b>
	<p> <b>Display: Backlit, 160 x 160 pixels</b>  <b>Operating Temperature: 0 to 60°C (32 to 140 F°)</b>  <b>Storage Temperature: -20 to 70°C (-4 to 158 F°)</b>  <b>Description</b> Power: 8 to 18 Volts provided via DLC  <b>Unit Dimensions: 126 mm×88 mm×22 mm</b>            (Length×Width×Thickness)  <b>Test Cable length: 0.9m</b> </p>



	 
	<b>Injector Cleaner CNC402A</b> جهاز تنظيف بخاخات <b>Model</b>
<b>SR 6200</b>	FOB Jeddah <b>Price</b>
<b>1-2 sets</b>	<b>MOQ</b>

<b>Description</b>	<ul style="list-style-type: none"> <li>* <b>Power supply: AC220V±10%, 50/60Hz;AC110V±10%, 50/60Hz.</b></li> <li>* <b>Input power: 250W;</b></li> <li>* <b>Ultrasonic cleaner power: 100W;</b></li> <li>* <b>Simulated RPM range: 109990rpm; step: 10rpm;</b></li> <li>* <b>Time range: 19999s;</b></li> <li>* <b>Pulse width: 0.525ms; step 0.1 ms;</b></li> <li>* <b>Fuel tank capacity: 4700ml;</b></li> <li>* <b>Dimensions: 385mm×410mm×500mm;</b></li> <li>* <b>Weight: About 35kg</b></li> </ul>
--------------------	--


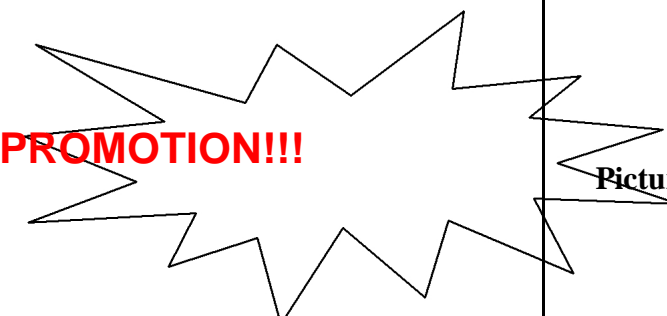
	
--	---


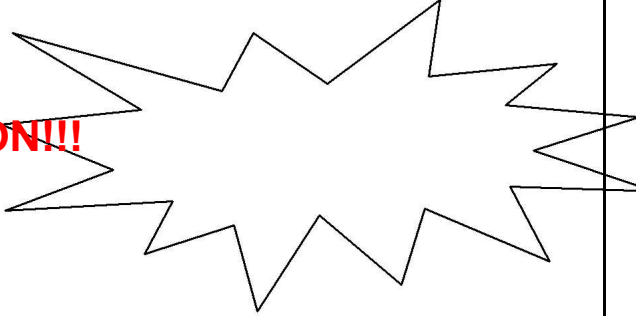
	<b>Injector Cleaner CNC602A</b> جهاز تنظيف بخاخات	<b>Model</b>
	<b>SR 6800</b> FOB Jeddah	<b>Price</b>
<b>1 -2 sets</b>		<b>MOQ</b>


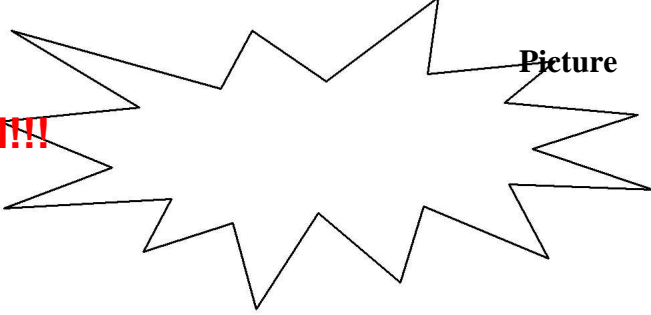
<b>Description</b>	<ul style="list-style-type: none"> <li>* <b>Power supply: AC220V±10%, 50/60Hz;AC110V±10%, 50/60Hz.</b></li> <li>* <b>Input power: 250W;</b></li> <li>* <b>Ultrasonic cleaner power: 100W;</b></li> <li>* <b>Simulated RPM range: 109990rpm; step: 10rpm;</b></li> <li>* <b>Time range: 19999s;</b></li> <li>* <b>Pulse width: 0.525ms; step 0.1 ms;</b></li> <li>* <b>Fuel tank capacity: 4700ml;</b></li> <li>* <b>Dimensions: 385mm×410mm×500mm;</b></li> <li>* <b>Weight: About 35kg</b></li> </ul>
--------------------	--



	 	Picture
	<b>Injector Cleaner CNC601A</b>	Model
	<b>SR 7500 FOB Jeddah</b>	Price
	<b>1-2 sets</b>	MOQ
	<p><b>Specification</b></p> <ul style="list-style-type: none"> <li>* Power supply: AC220V±10%, 50/60Hz;AC110V±10%, 50/60Hz.</li> <li>* Input power: 250W;</li> <li>* Ultrasonic cleaner power: 100W;</li> <li>* Simulated RPM range: 109990rpm; step: 10rpm;</li> <li>* Time range: 19999s;</li> <li>* Pulse width: 0.525ms; step 0.1 ms;</li> <li>* Fuel tank capacity: 4700ml;</li> <li>* Dimensions: 385mm×410mm×500mm;</li> <li>* Weight: About 35kg</li> </ul>	Description



	 	Picture
	<b>Injector Cleaner CNC801A</b>	Model
	<b>SR 10000 FOB Jeddah</b>	Price
	<b>1-2 sets</b>	MOQ

<p><b>Power supply: AC220V+/-10% 50Hz/60Hz</b></p> <p><b>Input power: 450W</b></p> <p><b>Ultrasonic wave cleaning power: 100W</b></p> <p><b>RPM range for simulating test: 10~9990rpm</b></p> <p><b>Fuel injection pulses width: 0.5-25.0 ms</b></p> <p><b>Count range: 1-9999 times</b></p> <p><b>Timing range: 1-9999 seconds</b></p> <p><b>Tank volume: 2500ml</b></p> <p><b>Size: 550 x 530 x 1400mm Weight: 85kg</b></p>	<b>Description</b>
<div style="display: flex; align-items: center; justify-content: space-around;">  <div style="text-align: center;">  <p><b>PROMOTION!!!</b></p> </div> </div>	<b>Picture</b>
<b>ATF Changer (CAT402)</b>	<b>Model</b>
SR 7900 FOB Jeddah	<b>Price</b>
<b>1 -2 sets</b>	<b>MOQ</b>
<ul style="list-style-type: none"> <li>* <b>Power supply: DC 12V</b></li> <li>* <b>Maximum power: 150W</b></li> <li>* <b>Pressure gauge: 0~150psi</b></li> <li>* <b>Fluid outlet hose: 2 m</b></li> <li>* <b>Fluid return hose: 2 m</b></li> <li>* <b>Fluid tank: 15L×2Equivalent exchange error: ±100ml</b></li> <li>* <b>Max exchange speed: 2L/MIN</b></li> <li>* <b>Noise: &lt;70db</b></li> <li>* <b>Net weight: 40Kg</b></li> <li>* <b>Gross weight: 45Kg</b></li> <li>* <b>Size : 640×430×932 mm</b></li> </ul>	<b>Description</b>

 <p style="color: red; font-weight: bold; font-size: 24px; text-align: center;">PROMOTION!!!</p>	 <p>Picture</p>																
<b>ATF Changer (CAT401)</b>	<b>Model</b>																
<b>SR 9000 FOB Jeddah</b>	<b>Price</b>																
<b>1-2 sets</b>	<b>MOQ</b>																
<ul style="list-style-type: none"> <li>* Power supply: DC 12V</li> <li>* Maximum power: 150W</li> <li>* Pressure gauge: 0~150psi</li> <li>* Fluid outlet hose: 3m</li> <li>* Fluid return hose: 1m</li> <li>* Fluid draining hose: 1m</li> <li>* Filter precision: 5µm</li> <li>* Fluid tank: 25L×2</li> <li>* Equivalent exchange error: ±100ml</li> <li>* Net weight: 77Kg</li> <li>* Gross weight: 106Kg</li> </ul> <p style="text-align: right; margin-right: 20px;">* Noise: &lt;70db</p> <p style="text-align: right; margin-right: 20px;"><b>Spare Parts</b></p> <table border="0" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">No.</th> <th style="text-align: left;">PartCode</th> <th style="text-align: left;">PartName</th> <th style="text-align: left;"></th> </tr> </thead> <tbody> <tr> <td></td> <td>CAT-302</td> <td>Adaptor Kit</td> <td>X103260049 1</td> </tr> <tr> <td></td> <td>Fluid filter,</td> <td>YO-104</td> <td>103260005 2</td> </tr> <tr> <td></td> <td>CAT-401</td> <td>User Manual(En&amp;Chinese)</td> <td>107010678 3</td> </tr> </tbody> </table>	No.	PartCode	PartName			CAT-302	Adaptor Kit	X103260049 1		Fluid filter,	YO-104	103260005 2		CAT-401	User Manual(En&Chinese)	107010678 3	<b>Description</b>
No.	PartCode	PartName															
	CAT-302	Adaptor Kit	X103260049 1														
	Fluid filter,	YO-104	103260005 2														
	CAT-401	User Manual(En&Chinese)	107010678 3														


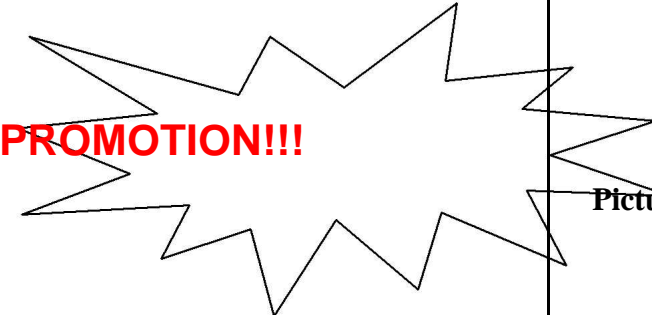
	 <p style="color: red; font-weight: bold; font-size: 24px; text-align: center;">PROMOTION!!!</p>	 <p>Picture</p>
	<b>(TLT830A)</b>	<b>Wheel Alignment Scissor Lift Model</b>
	<b>SR 32000 FOB Jeddah</b>	<b>Price</b>

<b>1-2 sets</b>	<b>MOQ</b>
<ul style="list-style-type: none"> <li>*Master scissor:</li> <li>*Lifting height (mm) 1850</li> <li>*Rated capacity (kg) 3000</li> <li>*Motor(kw) 2.2</li> <li>*Size of platform(mm) 4000×550</li> <li>*Max. working pressure(Mpa)28</li> <li>*Pneumatic pressure(kg/cm2) 5</li> <li>*Noise(db) ≤70</li> <li>*Weight(kg) 2050</li> </ul> <p>Small scissor:</p> <ul style="list-style-type: none"> <li>*Lifting height (mm) 430</li> <li>*Rated capacity(kg) 3000</li> <li>*Size of platform(mm) 1400×550</li> </ul>	<b>Description</b>
	
	<b>picture</b>
	<b>Model</b>
<b>SR 23000 FOB Jeddah</b>	<b>Price</b>
<b>10-20sets</b>	<b>MOQ</b>
<ul style="list-style-type: none"> <li>*Rated capacity(kg) 3000</li> <li>*Lifting height(mm) 1750</li> <li>*Platform size(mm) 1580X520</li> <li>*Motor power(kw) 2.2</li> <li>*Max. hydro pressure(Mpa) 28</li> <li>*Pneumatic pressure(kg/cm2) 5</li> <li>*Noise(db) ≤70</li> <li>*Overall weight(kg) 630</li> </ul>	<b>Description</b>


<b>Picture</b>		
	<b>Four post lift (TLT440E )</b>	<b>Model</b>
	SR 22000 FOB Jeddah	<b>Price</b>
<b>1-2 sets</b>		<b>MOQ</b>
<ul style="list-style-type: none"> <li>*Load capacity(kg) 4000</li> <li>*Lifting height(mm) 1850</li> </ul>		<b>Description</b>



<ul style="list-style-type: none"> <li>*Raising time(s) <math>t \leq 60</math></li> <li>*Lowering time(s) <math>20 \leq t \leq 40</math></li> <li>*Power(kw) 2.2</li> <li>*Passing width(mm) 3045</li> <li>*Equipment width(mm) 3445</li> <li>*Equipment height(mm) 2172</li> <li>*Runway length(mm) 4240</li> <li>*Runway width(mm) 500</li> <li>*Max wheel base(mm) 1950</li> <li>*Min wheel base(mm) 950</li> <li>*Lowest height(mm) 220</li> </ul>	
--	--

		Picture
--	---	---------


<b>Wheel aligner Four post lift (TLT440EW)</b>	<b>Model</b>
<b>SR 23000 FOB Jeddah</b>	<b>Price</b>
<b>1-2 sets</b>	<b>MOQ</b>
<ul style="list-style-type: none"> <li>*Load capacity(kg) 4000</li> <li>*Lifting height(mm) 1850</li> <li>*Raising time(s) <math>t \leq 60</math></li> <li>*Lowering time(s) <math>20 \leq t \leq 40</math></li> <li>*Power(kw) 2.2</li> <li>*Passing width(mm) 3045</li> <li>*Equipment width(mm) 3445</li> <li>*Equipment height(mm) 2172</li> <li>*Runway length(mm) 4240</li> <li>*Runway width(mm) 500</li> <li>*Max wheel base(mm) 1950</li> <li>*Min wheel base(mm) 950</li> <li>*Lowest height(mm) 220</li> </ul>	<b>Description</b>

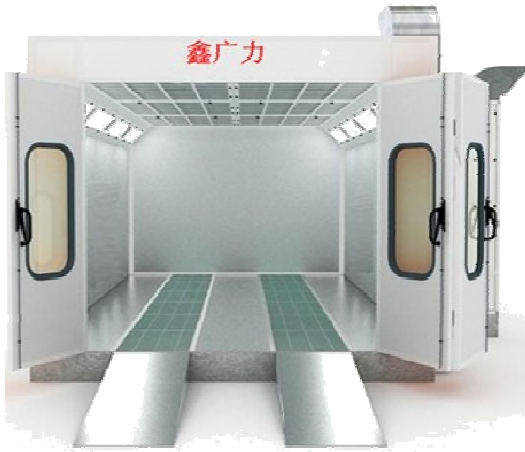

	<b>Spray Booth (BZB1000 )</b>	<b>Model</b>
	<b>SR 65000 FOB JEDDAH</b>	<b>Price</b>
	<b>1-2 sets</b>	<b>MOQ</b>
	<p>1.Overall dimension(m):7.0*5.3*3.5          2.inner dimension(m):6.9*3.9*2.7          3.Width of door for entrance of vehicle(m):3.0          4.Height of door for entrance of vehicle(m):2.7          5.steel plate thickness(mm):0.326          6.filtrated area(m2):20          7.Air flow volume(m3/h):21000          8.Air velocity within booth(m/s):0.25~0.35          9.Ventilation times(times/hr):265          10.Working temperature(°C):60~80          11.Oil consumption(kg/set):6~8          12.Power(kw):9          13.Main blower:One unit 7.5KW European style professional blowers          14.Nether lighting:no          15.environmental protection device:no</p>	<b>Description</b>



	<b>Collision Repair System (TCR-101)</b>	<b>Model</b>
	FOB Jeddah	SR 75000 <b>Price</b>
	<b>1-2 sets</b>	<b>MOQ</b>

<b>Description</b>	<p> <b>1.Length:5328mm</b>  <b>2.Width:2000mm</b>  <b>3.Height:300mm</b>  <b>4.Hydraulic Power:70Mpa</b>  <b>5.Power Pulling Capacity:98000N</b>  <b>6.Radius of Pulling:360°</b>  <b>7.Air supply Required:100PSI</b> </p>	
<b>Picture</b>		
	<b>BZB-2000 Car Spray Booth</b>	<b>Model</b>
	<b>SR 75000 FOB Jeddah</b>	<b>PRICE</b>
1-2 SETS		<b>MOQ</b>